

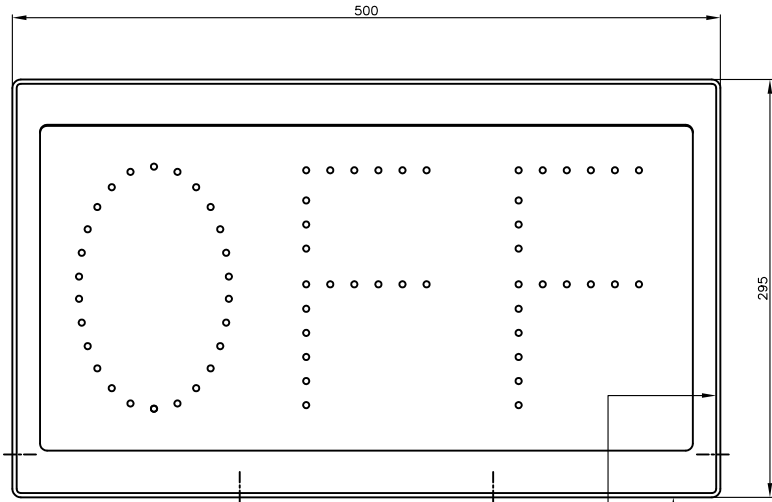


Uncontrolled When Printed

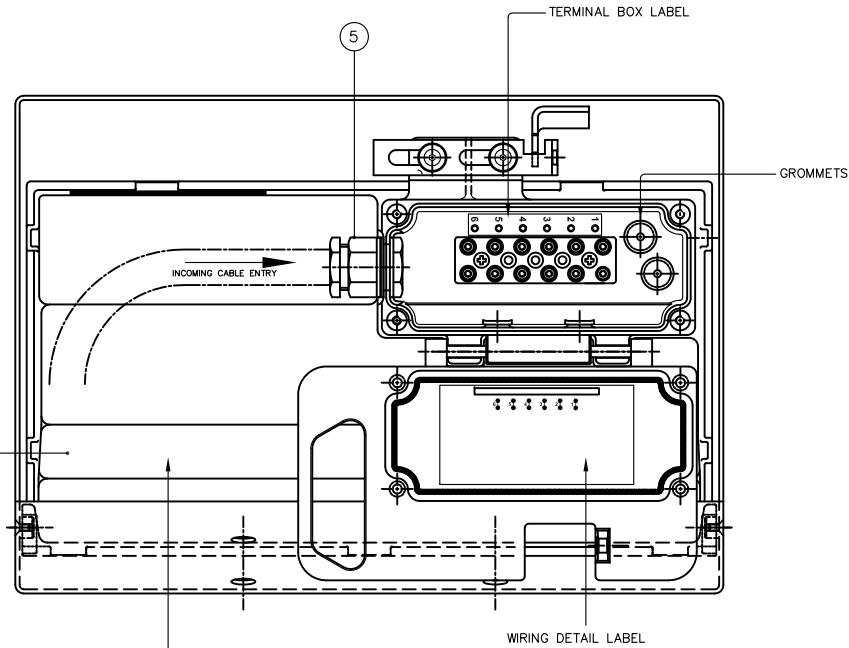

STENCIL INDICATOR S/OFF-----/1S
SHOWN FOR ILLUSTRATION ONLY

OUTSIDE FACES AND INTERNAL FRONT FACES TO BE PAINTED AS FOLLOWS
ETCH PRIMER 2 PACK -BASE BR SPEC 81 ITEM 104A
ACID BR SPEC 81 ITEM 104B
TOP COAT - MICACEOUS IRON OXIDE MATT BLACK BR SPEC 70 ITEM 30

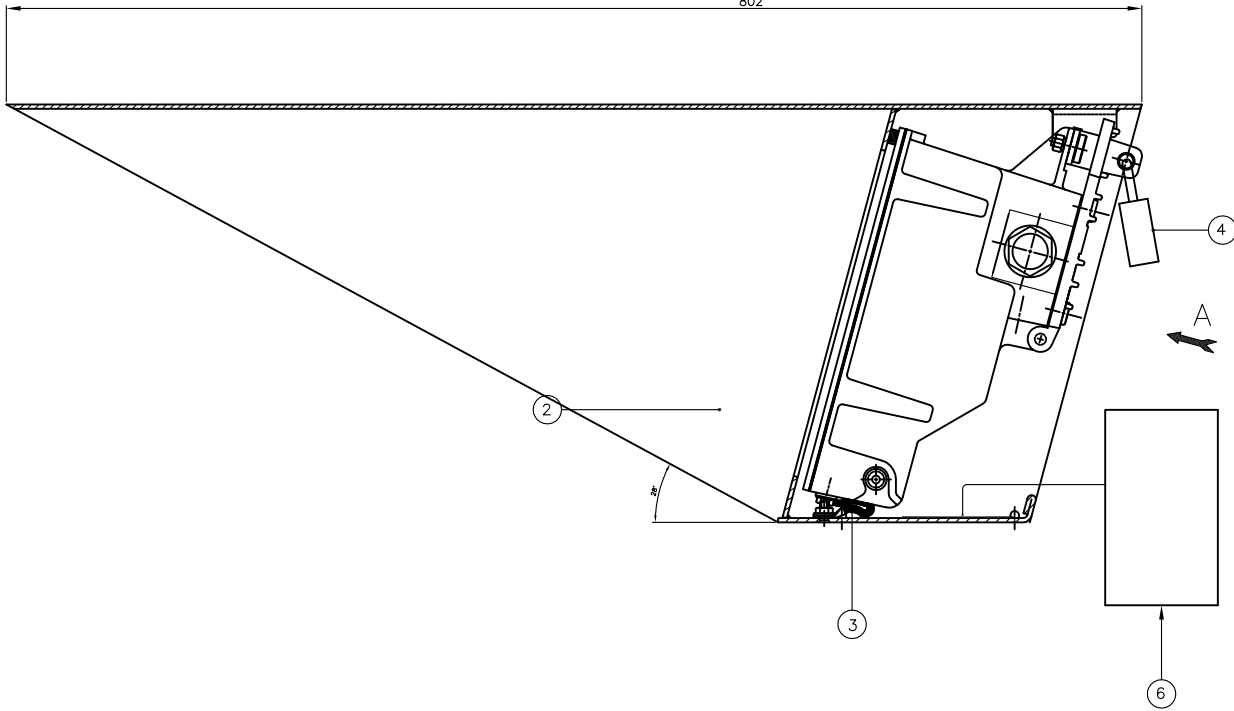


VIEW ON ARROW A
WITH TERMINAL BOX COVER IN OPEN POSITION

ALL INTERNAL AND REAR FACES TO BE PAINTED AS FOLLOWS
ETCH PRIMER 2 PACK -BASE BR SPEC 81 ITEM 104A
ACID BR SPEC 81 ITEM 104B
TOP COAT - MICACEOUS IRON OXIDE LIGHT GREY BR SPEC 70 ITEM 27A

PADS No.	DORMAN PART No.	DESCRIPTION	REAR ENCLOSURE PART No
086/021020	S/S-(SPECIAL 1 INDICATION)-/1S	SINGLE STENCIL INDICATOR,SPECIAL,110v,PROVING	CONTACT DORMAN SALES-RAIL
086/021020	S/S-(SPECIAL 2 INDICATION)-/1S	SINGLE STENCIL INDICATOR,SPECIAL,110v,PROVING	CONTACT DORMAN SALES-RAIL
086/021020	S/S-(SPECIAL 3 INDICATION)-/1S	SINGLE STENCIL INDICATOR,SPECIAL,110v,PROVING	CONTACT DORMAN SALES-RAIL
086/021020	S/S-(SPECIAL 4 INDICATION)-/1S	SINGLE STENCIL INDICATOR,SPECIAL,110v,PROVING	CONTACT DORMAN SALES-RAIL
086/021022	S/RA-----/1S	SINGLE STENCIL INDICATOR,RA,110v,PROVING	D82.81002
086/021023	S/OFF-----/1S	SINGLE STENCIL INDICATOR,OFF,110v,PROVING	D82.81003
086/021024	S/CD-----/1S	SINGLE STENCIL INDICATOR,CD,110v,PROVING	D82.81006
086/021025	S/CD:RA-----/1S	SINGLE STENCIL INDICATOR,CD:RA,110v,PROVING	D82.81007

NOTE:-IF NOT COVERED IN THE ABOVE TABLE, A CUSTOMER SPECIFIC INDICATOR ORDER MUST QUOTE
THIS DRAWINGS GENERIC PADS NUMBER AND THE DORMAN PART NUMBER.


THE DORMAN PART NUMBER COMPRISES A 15-DIGIT CODE, SIGNIFYING THE FOLLOWING:-

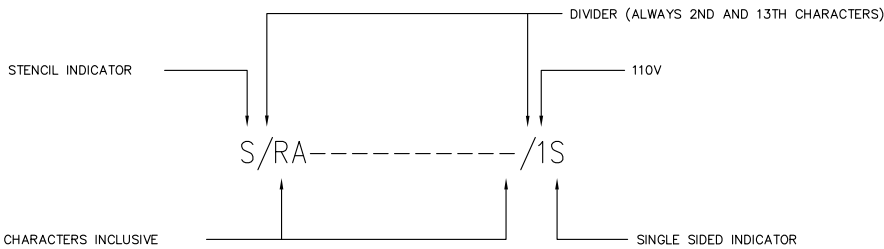

3RD TO 12TH CHARACTERS INCLUSIVE
CONTAIN THE ALPHANUMERIC CODE
TOGETHER WITH COLONS, WHICH
SIGNIFY THE LETTERS AND NUMBERS
TO BE DISPLAYED AND THE NUMBER
OF SWITCHING CIRCUITS.


e.g. S/CD:RA-----/1S

THE ABOVE DENOTES A STENCIL INDICATOR WHICH DISPLAYS CD AND RA, INDEPENDANTLY CONTROLLED
BY TWO CIRCUITS OPERATING ON 110V SUPPLY AND IS A SINGLE SIDED UNIT.
(THE COLON BETWEEN CD AND RA SIGNIFIES THAT EACH GROUP OF LETTERS HAS ITS OWN CIRCUIT).

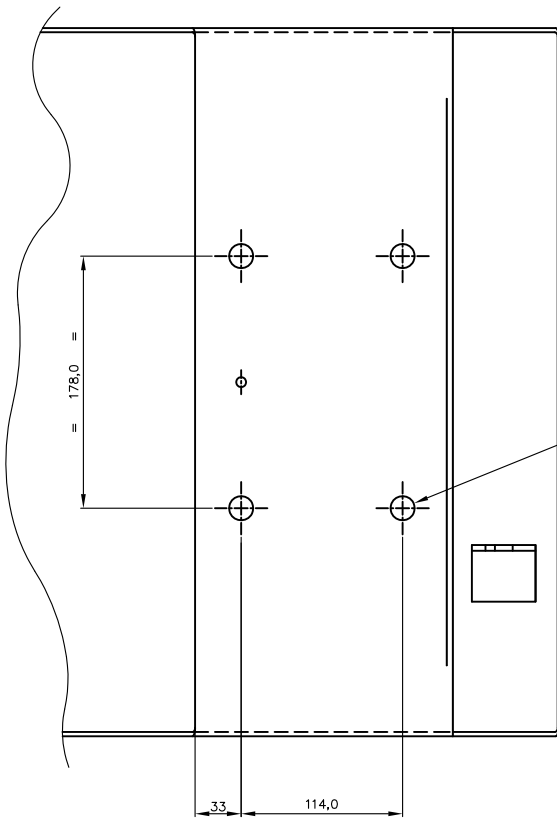

PART VIEW ON BOTTOM FACE
INNER ENCLOSURE OMITTED FOR CLARITY

ITEM	QTY	PART N°	MATERIAL	DESCRIPTION
1	1	SEE CHART	ALUMINIUM CASTING	SINGLE REAR ENCLOSURE
2	1	B20.19097	3 MM ALUMINIUM FABRICATION	OUTER COVER
3	1	B14.13105	CIRCULAR TINNED COPPER BRAID	EARTH BONDING STRAP
4	1	PADS 0086/029003	BRASS	RKB221 PADLOCK
5	1	B19.18015	NYLON	M32 GPL CABLE GLAND
6	1	C64.63502	VINYL	IDENTIFICATION LABEL

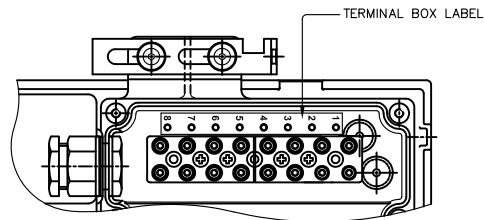

TERMINAL BLOCK ARRANGEMENT WHEN FOUR
INDIVIDUALLY ILLUMINATED CHARACTERS
ARE REQUIRED i.e. 1:2:3:4

1	22/01/07BT	SEE DCC 3449	
0	07/06/05BT	DCC No. 2809	
ISS	DATE	INI	ALTERATIONS
DORMAN			
SOUTHPORT PR9 8LA ENGLAND			
THIS DOCUMENT AND THE INFORMATION THEREIN IS CONFIDENTIAL AND MAY NOT BE USED OR DISCLOSED WITHOUT WRITTEN AUTHORIZATION			
DRAWING No		PART No.	ISSUE
GENERIC SINGLE MINIATURE ALPHANUMERIC ROUTE INDICATOR			1

TITLE				THIRD ANGLE PROJ	
SINGLE MINIATURE ALPHANUMERIC ROUTE INDICATOR ASSY				Document N° 0100-2205-1	
MATERIAL		TOLERANCES		DRAWN BT	
X		+ / -		APPROVED LG	
X,0		0,10		DATE 01/06/2005	
X,00		0,05		SCALE NTS	
X,000		0,025		SHEET 1 OF 1 SHEETS	
ANGULAR		0.25°			

DORMAN REF No.
GENERIC SINGLE MINIATURE
ALPHANUMERIC ROUTE INDICATOR

CUSTOMER REF No.

ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED

DO NOT SCALE

ORIGINAL DRAWING FRAME A1 DO NOT SCALE