

Uncontrolled When Printed

ITEM	QTY	PART N°	DESCRIPTION
1	1	C82.61121	BODY (MODIFIED)
2	1	B16.15213	SERIAL LABEL
3	1	D29.28022	POSITIVE BATTERY STRIP ASSEMBLY
4	1	D29.28023	NEGATIVE BATTERY STRIP ASSEMBLY
5	4	B17.16037	M6 X 16 SL PAN HD SCREW
6	4	B17.16042	M6 INTERNAL S/PROOF WASHER
7	4	B17.16041	M6 MS PLAIN WASHER
8	1	B20.19027	OUTER BRACKET
9	1	B20.19026	INNER BRACKET
10	4	B09.08035	RUBBER SEALING WASHER
11	1	B17.16146	M6 BOLT
12	1	B18.17063	M6 SS SPRING WASHER
13	1	B05.04018	BATTERY CARRIER
14	4	B09.08153	BATTERY PAD
15	1	B09.08155	BREATHING PLUG
16	1	D29.28024	SEALING RING
17	1	B05.04017	LENS
18	2	B18.17026	M2 X 6 LONG POZI PAN HEAD SCREW (SS)
19	2	B18.17029	M2 PLAIN WASHER
20	2	B18.17030	M2 SPRING WASHER
21	4	B18.17056	M4 X 20 POZI PAN HEAD SCREW
22	4	B18.17051	M4 SPRING WASHER
23	4	B18.17047	M4 PLAIN WASHER
24	1	B70.69014	REFLECTOR
25	1	D29.28018	PCB ASSEMBLY
26	1	B09.08154	O-RING
27	1	B05.04020	SWITCH
28	1	B05.04021	SWITCH WASHER
29	1	B17.16148	PUSH ON RETAINING WASHER
30	2	B05.04019	LOW BATTERY INDICATOR LENS
31	1	SEE ORDER	REFLECTIVE LABEL

PACK IN B15.14047 CARTON
INSTRUCTION LEAFLET C64.63240

SEAL JOINT TO BOTTOM AS SHOWN



* B R T L N 3 / R *

4	18/08/14	MD	SEE ECN628_16
3	17/12/13	IW	ECN347
2	24/07/03	BT	SEE DCC No 1990
1	10/12/01	IW	SEE DCC No 1829
0	26/09/01	IW	ORIGINAL
ISS	DATE	INI	ALTERATIONS

DORMAN

DORMAN TRAFFIC PRODUCTS LTD
SOUTHPORT PR9 8LA ENGLAND

THIS DOCUMENT AND THE INFORMATION THEREIN
IS CONFIDENTIAL AND MAY NOT BE USED OR
DISCLOSED WITHOUT WRITTEN AUTHORIZATION

DRAWING No

BRTL N3/R

TITLE
MK 3 TAIL LAMP ASSY


THIRD ANGLE PROJ
Document N° A099-001

MATERIAL

TOLERANCES

X	+	-	0,25
X,0	+	-	0,10
X,00	+	-	0,05
X,000	+	-	0,025
ANGULAR	+	-	0,25°

DRAWN	IW
APPROVED	DR
DATE	12/02/01
SCALE	1:1
SHEET	1 OF 1 SHEETS

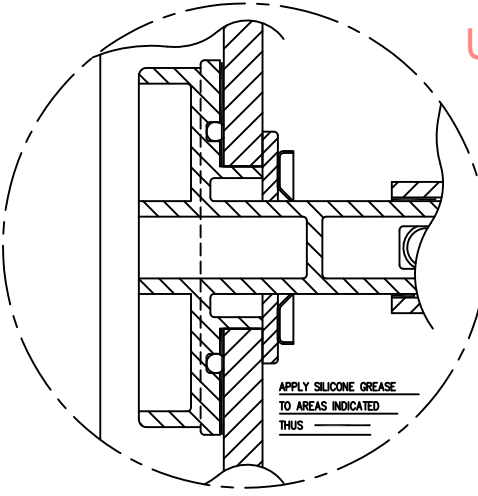

SWITCH ASSY 2:1 SHOWING LUBRICATION DETAILS

0,5 MAX - 0,1 MIN

APPLY VASELINE TO CONTACT PADS

APPLY A SPOT OF DOW CORNING 3140 SILICONE TO RETAIN PLUG

COAT THREADS OF BOLT WITH
VASELINE PRIOR TO FITTING

ONE ON EACH INSIDE FACE

VIEW WITH LENS REMOVED

ATTACH TO BATTERY CARRIER PRIOR TO ASSY